


EQUIPMENT
SPECIFICATIONS



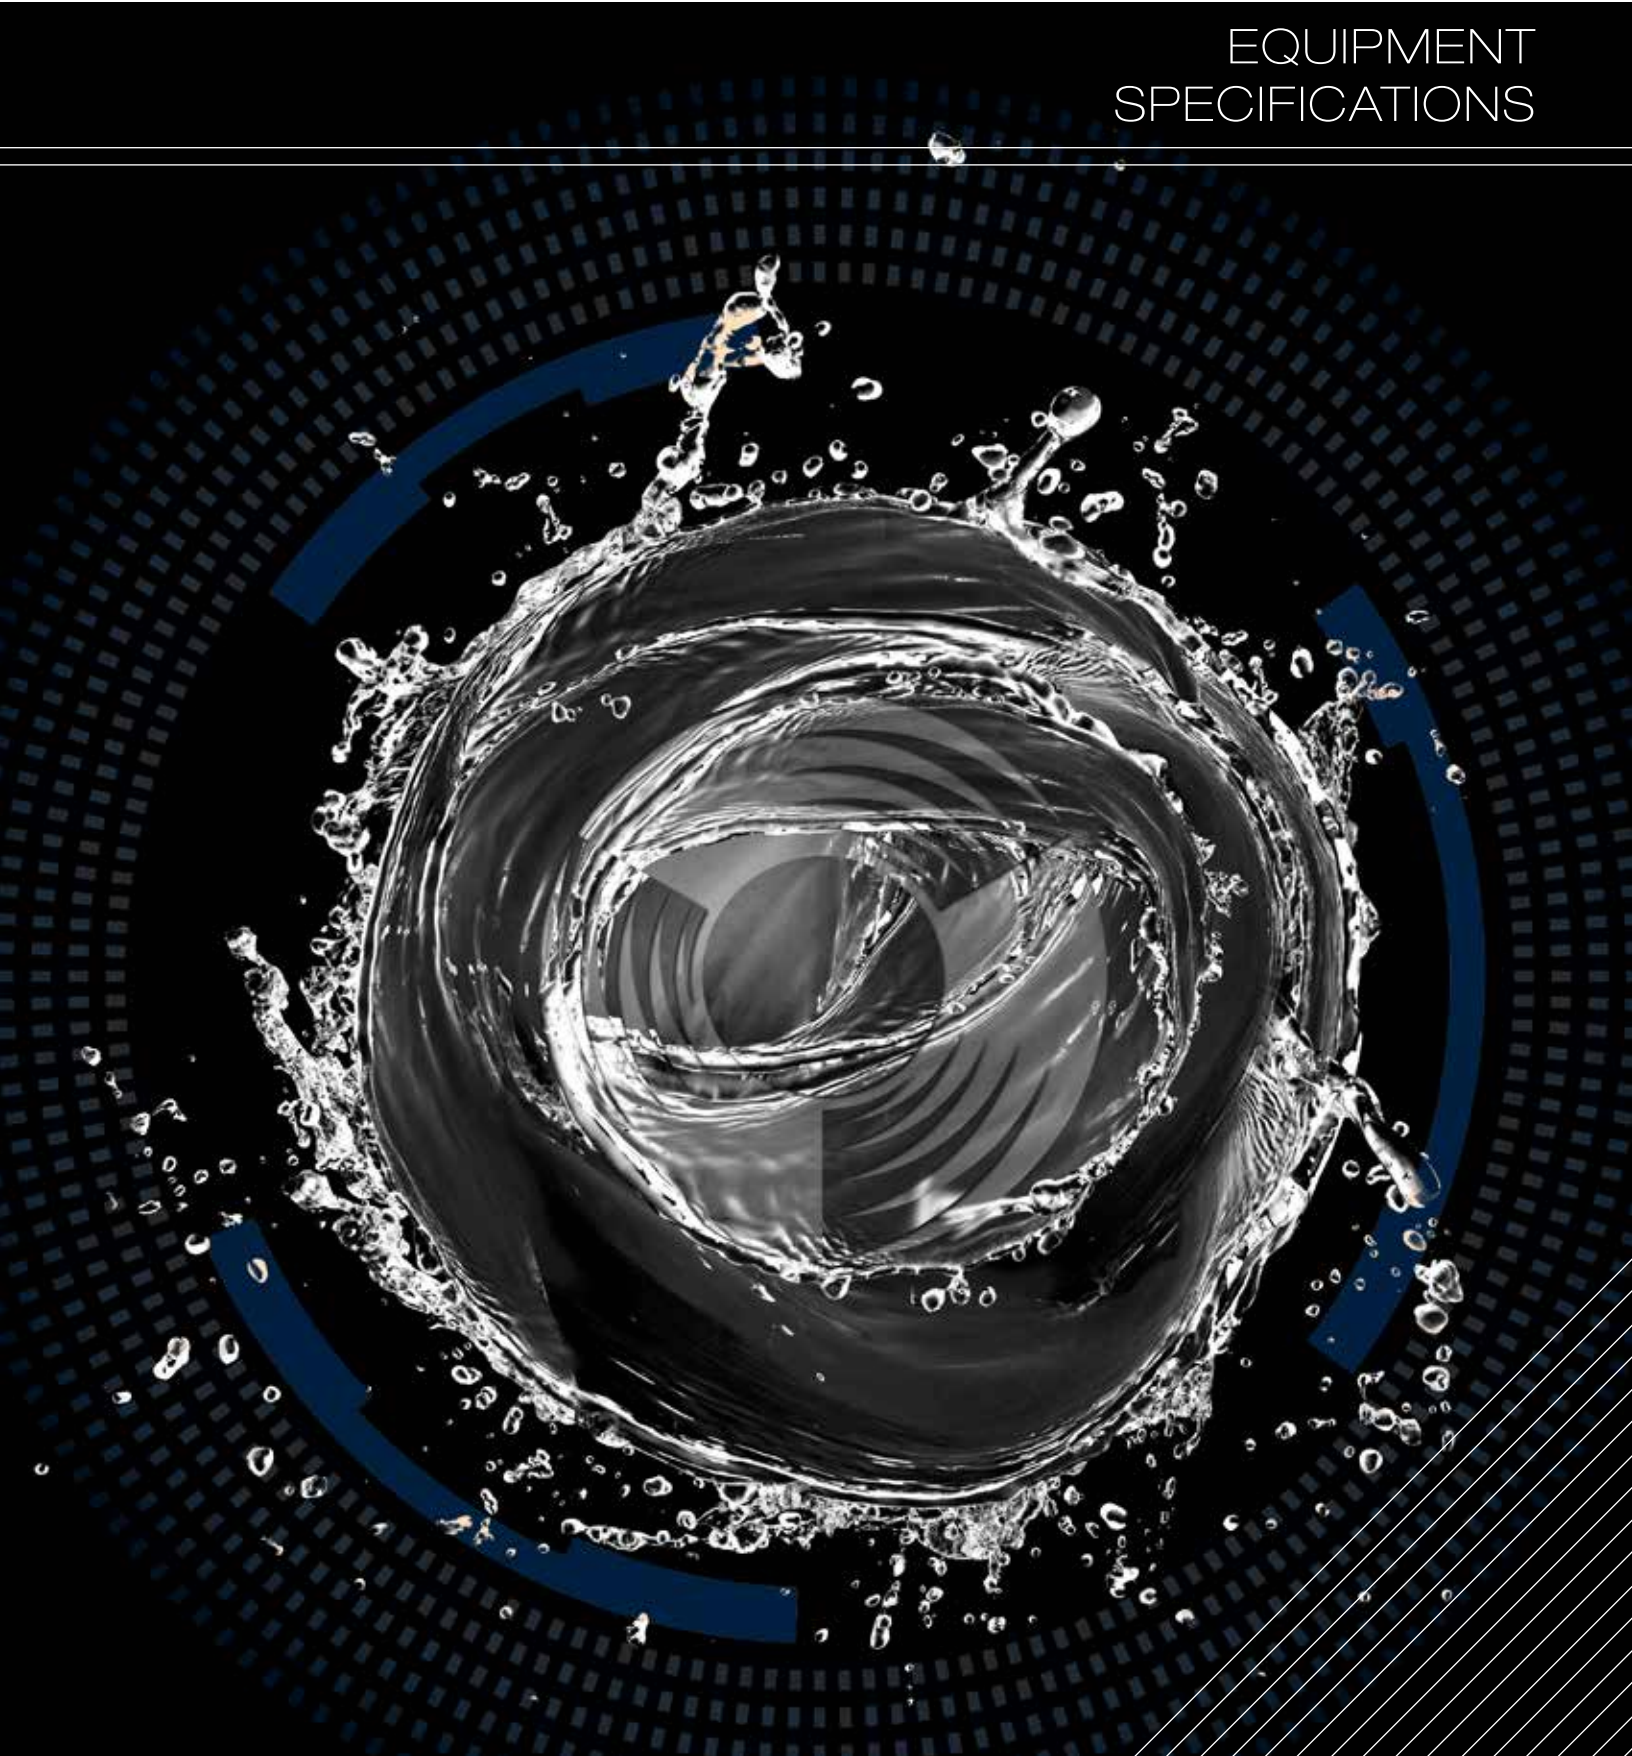

BOS CENTRIFUGES

	DESCRIPTION	DIMENSIONS L X W X H	SHIPPING WEIGHT
BOS 20 A Series D Series	<ul style="list-style-type: none"> Hydraulic capacity - 265 gpm (1000 lpm) Solids rate removal per hour - 5.5 ton (5 tonne) Variable speed main drive, back drive & pump Bowl length & diameter - 56" x 14" (1422 mm x 355 mm) (A) back drive 15 hp (D) back drive 20 hp Main drive 50 hp 3" 10 Hp pump Power required 1 - 480v, 100amp, 3w4p 	(A) 13' x 4'6" x 5' (A) 4 m x 1.4 m x 1.5 m	(A) 6,000 lb (A) 2,722 kg
		(D) 14'6" x 4'10" x 4'3" (D) 4.4 m x 1.5 m x 1.3 m	(D) 7,500 lb (D) 3,402 kg
BOS 40 L Series T Series	<ul style="list-style-type: none"> Hydraulic capacity - 440 gpm (1665 lpm) Solids rate removal per hour - 12 ton (10.9 tonne) Variable speed main drive, back drive & pump Bowl length & diameter - 80" x 19" (2032 mm x 483 mm) Back drive 20 hp Main drive 125 hp 4" 20 Hp pump Power required 2 - 480v, 100amp, 3w4p 	(L) 16' x 4' x 4'11" (L) 4.9 m x 1.2 m x 1.5 m	(L) 12,000 lb (L) 5,443 kg
		(T) 15'2" x 3'9" x 4'8" (T) 4.6 m x 1.1 m x 1.4 m	(T) 10,500 lb (T) 4,763 kg
BOS 60	<ul style="list-style-type: none"> Hydraulic capacity - 705 gpm (2670 lpm) Solids rate removal per hour - 17 ton (15.4 tonne) Variable speed main drive, back drive & pump Bowl length & diameter - 96" x 22.6" (2438 mm x 574 mm) Back drive 30 hp Main drive 150 hp Pump 4" 20 hp Power required 2 - 480v, 100amp, 3w4p 	17' x 4'3" x 5' 5.2 m x 1.3 m x 1.5 m	14,500 lb 6,577 kg

Process rates based on fresh water.



Canada

Corporate Head Office
Calgary, AB
403.234.8103

Leduc District
780.986.3120

Grande Prairie District
780.567.4313

United States

Corporate Administrative Office
Houston, TX
281.477.5300

BOS Training Center
817.373.3700

Southern US District
817.373.3700

Midland District
682.202.5882

Oklahoma Repair Facility
405.605.4675

Appalachian District
724.564.5400

Rocky Mountain District
970.256.3600

Denver Sales Office
303.993.2798

Bakken District
701.224.7200

Mid-Continent
701.221-8181

SALES & MARKETING
salesandmarketing@bos-solutions.com

Global Contact
1.877.267.3434
www.bos-solutions.com