


EQUIPMENT
SPECIFICATIONS



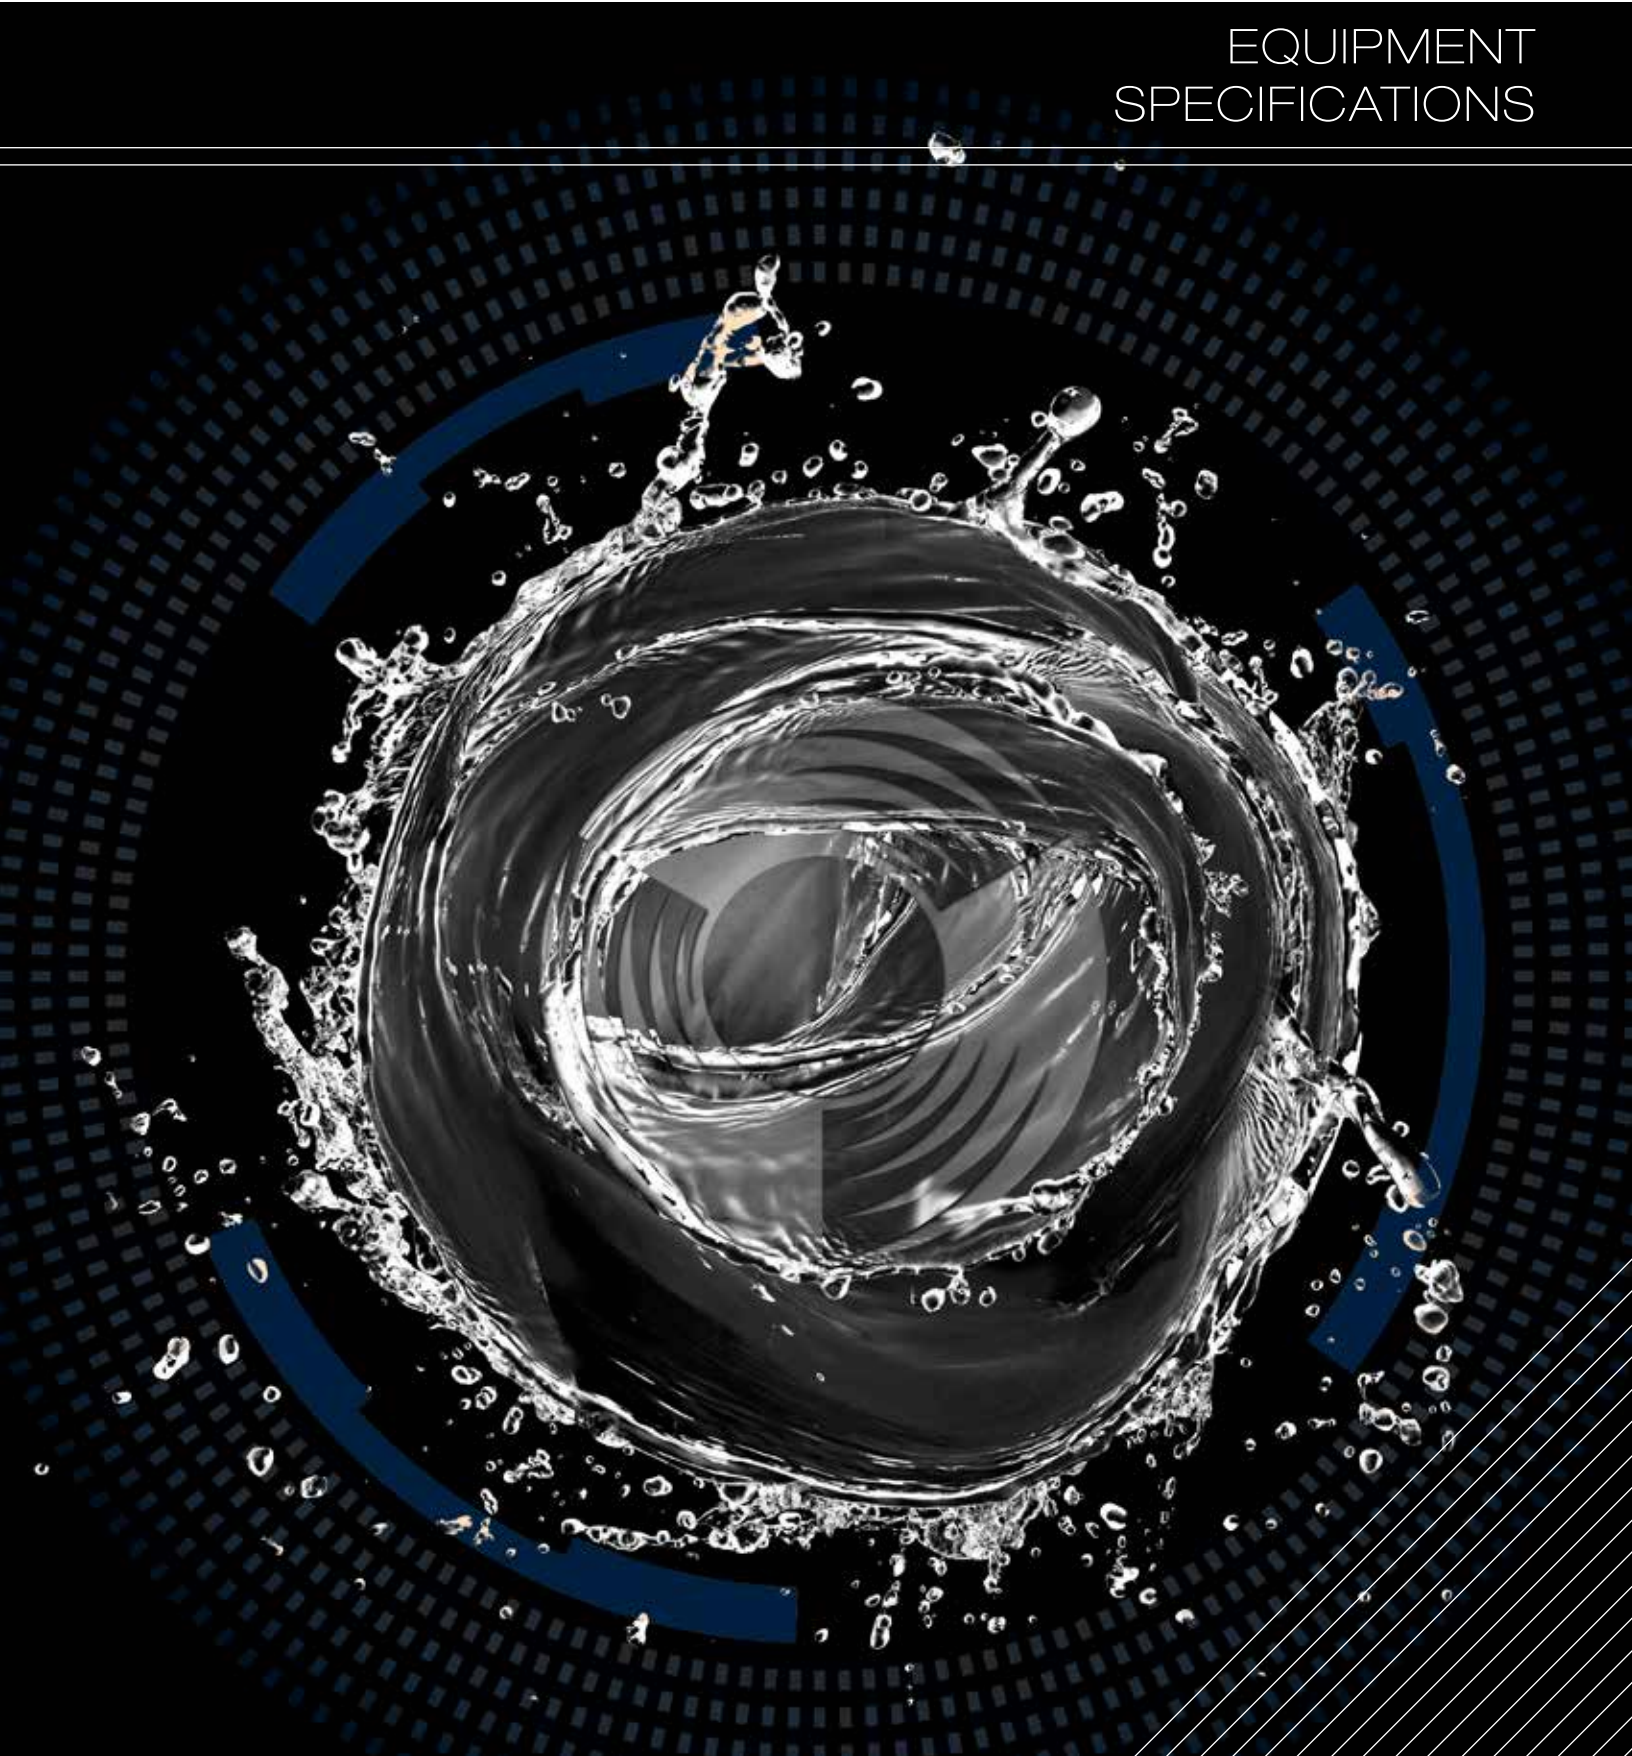

BOS III - CLOSED LOOP DRILL FLUID & DRILL SOLIDS MANAGEMENT SYSTEM

ADVANTAGES	WATER BASED APPLICATIONS	OIL BASED APPLICATIONS
<ul style="list-style-type: none"> • Eliminates the need for reserve pits • Easily adapts to manage a wide variety of fluid types and process requirements • Single load transportation for most applications • Minimal footprint, fast rig up, easily adapted to drill rig configurations • Hydraulic, dual centrifuge platform, heated pump house and safe stair system to eliminate the need for fall protection • Multi-cell, high volume tank provides flexibility in fluid management • Ability to isolate up to 9 cells to maintain a variety of drilling fluids or limit desired surface volume • No crane or picker required on rig moves 	<ul style="list-style-type: none"> • Highly efficient clear water drilling and dewatering system • Integrated dual variable speed polymer/chemical injection system and patented process maximizes process rate and minimizes chemical consumption • Optimizes drill fluid volume requirements and minimizes fluid and chemical waste • Easily adaptable to flocculation, air section dewatering, spent mud dewatering and barite recovery 	<ul style="list-style-type: none"> • Easily converts from water based to oil based drill fluid applications • Efficient process for simultaneously drying drill cuttings, barite recovery while maintaining accurate management of fluid density and low gravity solids • Drill cuttings processing requires minimal equipment addition of a slurry tank, transfer pump and cuttings sizing unit

SPECIFICATIONS	SHIPPING DIMENSIONS L X W X H	SHIPPING WEIGHT		
<ul style="list-style-type: none"> • 1 - 216 bbl (34.3 M³) 9 Cell flocculation tank • 2 - 15 bbl (2.4 M³) Polymer injection tanks • Enclosed and heated pump room housing centrifuge feed pumps and polymer injection pumps 	41' 3" x 12' 6" x 11' 6" 12.6 m x 3.8 m x 3.5 m	BOS III Tank only 34,000 lb 15,422 kg	BOS 20 Centrifuge A 6,000 lb A 2,722 kg D 7,500 lb D 3,402 kg	BOS 40 Centrifuge A 12,000 lb A 5,443 kg T 10,500 lb T 4,763 kg
	WORKING DIMENSIONS L X W X H			
	44' 3" x 12' 6" x 18' 13.6 m x 3.8 m x 5.5 m			



Canada

Corporate Head Office
Calgary, AB
403.234.8103

Leduc District
780.986.3120

Grande Prairie District
780.567.4313

United States

Corporate Administrative Office
Houston, TX
281.477.5300

BOS Training Center
817.373.3700

Southern US District
817.373.3700

Midland District
682.202.5882

Oklahoma Repair Facility
405.605.4675

Appalachian District
724.564.5400

Rocky Mountain District
970.256.3600

Denver Sales Office
303.993.2798

Bakken District
701.224.7200

Mid-Continent
701.221-8181

SALES & MARKETING
salesandmarketing@bos-solutions.com

Global Contact
1.877.267.3434
www.bos-solutions.com